

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



547 700

(43) International Publication Date  
16 September 2004 (16.09.2004)


PCT

(10) International Publication Number  
**WO 2004/078566 A1**

- (51) International Patent Classification<sup>7</sup>: **B62H 5/08**
- (21) International Application Number: PCT/NL2004/000164
- (22) International Filing Date: 5 March 2004 (05.03.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
1022848 5 March 2003 (05.03.2003) NL
- (71) Applicant (for all designated States except US): **SMART DESING** [NL/NL]; Maalderij 21, NL-1185 ZG Amstelveen (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **BLEIJENDAAL, Cornelis, Nicolaas, Maria** [NL/NL]; Eikenrodelaan 97, NL-1181 DG Amstelveen (NL).
- (74) Agent: **MERTENS, H.V.**; Exter Polak & Charlouis B.V., P.O. Box 3241, NL-2280 GE Rijswijk (NL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: BICYCLE LOCK

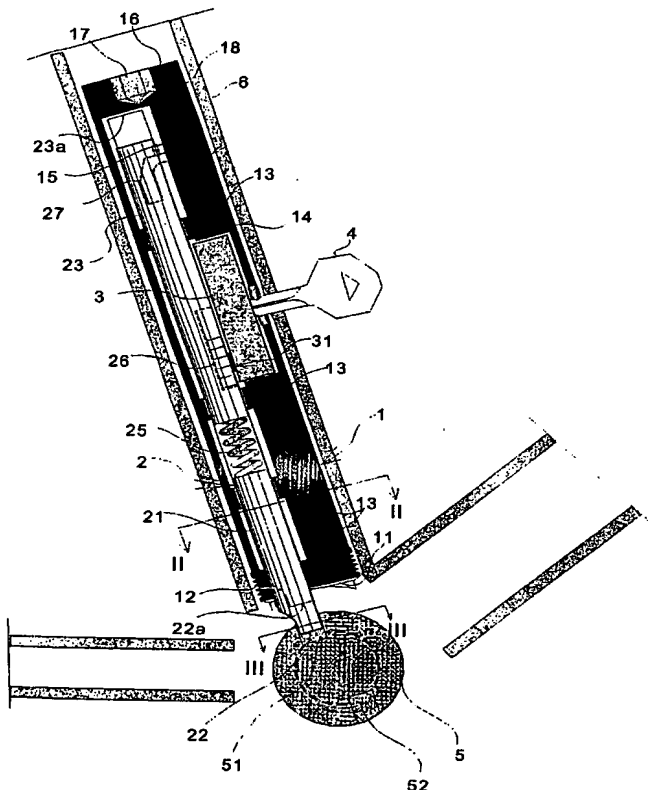

(57) Abstract: A bicycle lock for blocking a rotation of the crankshaft (5) of a bicycle is provided at the bottom in a saddle tube (6) of the bicycle close to the crankshaft. The bicycle lock comprises a lock housing (1) accommodating a locking pin (2) and a locking mechanism. The locking mechanism is adapted to fix the locking pin in two positions, wherein it releases or blocks the crankshaft. The bicycle lock is provided with coupling means (12) which are adapted to interact with counter-coupling means being part of the saddle tube in order to have a detachable coupling between the lock housing and the saddle tube. The lock housing (1) is coupled to the saddle tube (6) by a rotating coupling (12). The locking pin in the lower position thereof blocks the rotation of the coupling between the lock housing and the saddle tube.

WO 2004/078566 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*